

A2PIRE

COLLECTION



GLAZED VITRIFIED TILES

600 x 1200 mm

A2PIRETM

COLLECTION

Experience the allure of timeless elegance with our Aspire Series GVT tiles collection, available in 600x1200mm size. Elevate your spaces with sophisticated designs and unparalleled quality, adding a touch of luxurious charm to every room. Effortlessly transform your interiors with the enduring beauty and durability of Aspire's exquisite GVT tiles.

600x
1200mm





A2PIRE

FULL POLISH

COLLECTION

600x
1200mm

GLAZED
VITRIFIED TILES



**VERSATILE
SOLUTIONS**



**EASIER
TO LAY**



**RESISTANT TO
CHEMICAL**



**RESISTANT
TO LOADS**



**RESISTANT
TO STAINS**



**WIDE
RANGE**

GLAZED
VITRIFIED TILES


600x
1200mm

FULL
POLISH

A2PIRE

-  **VERSATILE SOLUTIONS**
-  **EASIER TO LAY**
-  **RESISTANT TO CHEMICAL**
-  **RESISTANT TO LOADS**
-  **RESISTANT TO STAINS**
-  **WIDE RANGE**

ASPIRE GRANDE POLAR WHITE FP

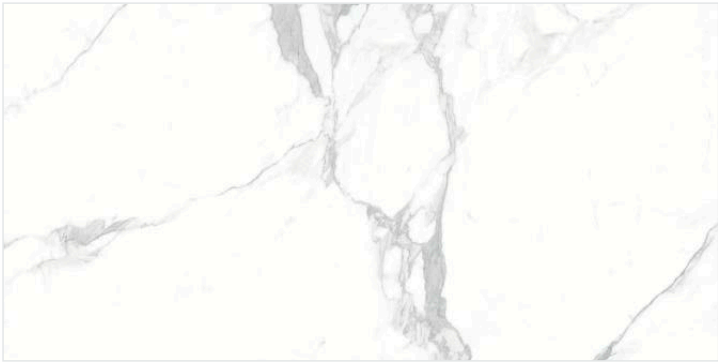

 **5 mm TILES SPACERS
RECOMMENDATION**



600x1200mm | Full Polish

Tiles Shown: ASPIRE GRANDE POLAR WHITE FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 


RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE CARRARA WHITE FP

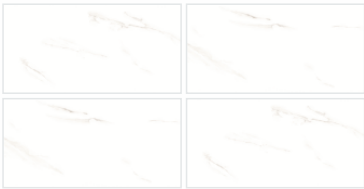

 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE CARRARA WHITE FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 


RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE DC SARA BIANCO FP

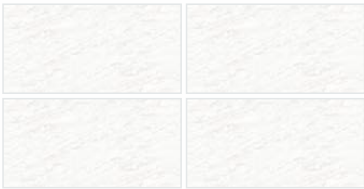

+ 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE DC SARA BIANCO FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 


RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE DELMONTE SILVER FP

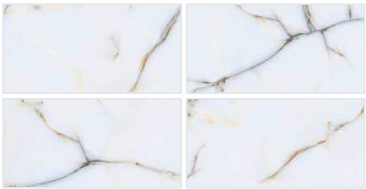

 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE DELMONTE SILVER FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

-  VERSATILE SOLUTIONS
-  EASIER TO LAY
-  RESISTANT TO CHEMICAL
-  RESISTANT TO LOADS
-  RESISTANT TO STAINS
-  WIDE RANGE

ASPIRE GRANDE EL BEUREN BEIGE FP



 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE EL BEUREN BEIGE FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 

RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 


RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE EL BEUREN GREY FP



 5 mm TILES SPACERS
RECOMMENDATION

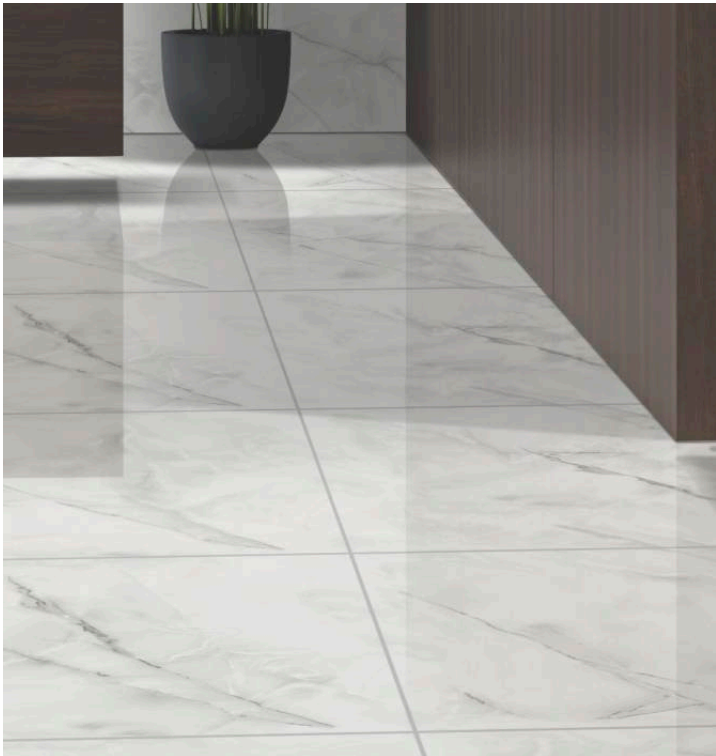

600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE EL BEUREN GREY FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 


RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE EL CARRARA FP

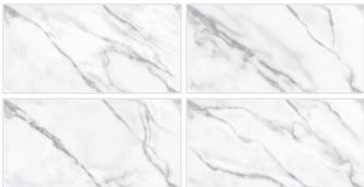

+ 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish

Tiles Shown: ASPIRE GRANDE EL CARRARA FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 

RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE EL FLAVICO WHITE FP



 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE EL FLAVICO WHITE FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 


RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE EL ORO NATURAL FP

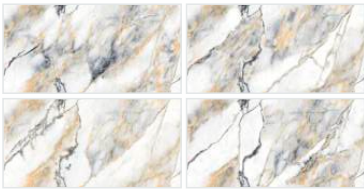

 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE EL ORO NATURAL FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 


RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 


RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE EL TOMENTO GREY FP

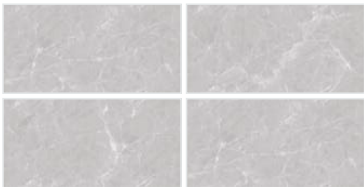

 5 mm TILES SPACERS
RECOMMENDATION

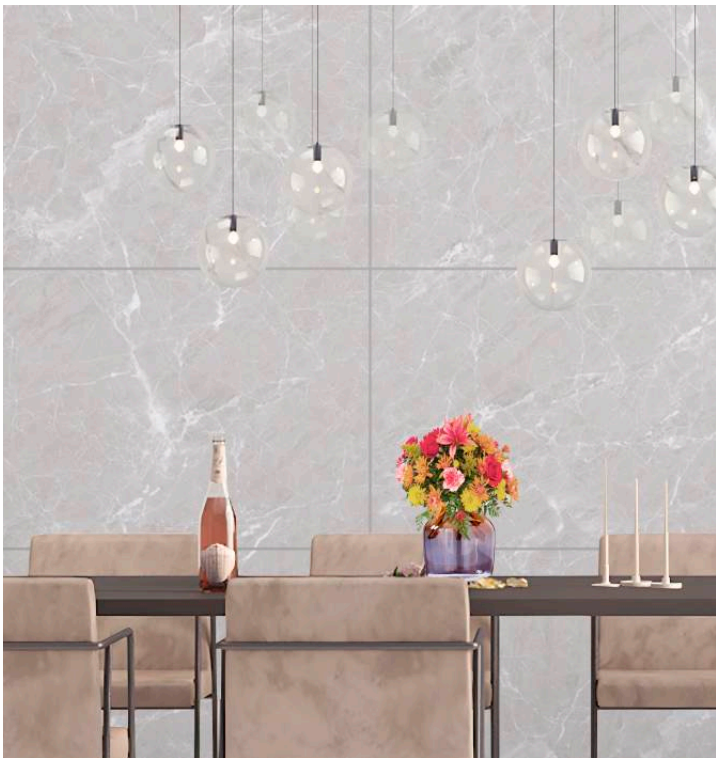

600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE EL TOMENTO GREY FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 


RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE EL VICTORIAN GREY FP

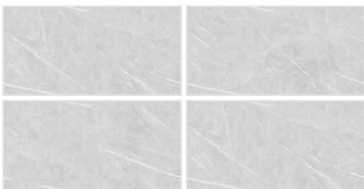

 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE EL VICTORIAN GREY FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 

RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE EL VOLCANO GREY FP



 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish Tiles Shown: ASPIRE GRANDE EL VOLCANO GREY FP



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 

RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE INTAGLIO DAYNORA WHITE



 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish

Tiles Shown:
ASPIRE GRANDE INTAGLIO DAYNORA WHITE



GLAZED
VITRIFIED TILES

600x
1200mm

FULL
POLISH

A2PIRE

- 

VERSATILE
SOLUTIONS
- 

EASIER
TO LAY
- 


RESISTANT TO
CHEMICAL
- 

RESISTANT
TO LOADS
- 

RESISTANT
TO STAINS
- 

WIDE
RANGE

ASPIRE GRANDE JULIET BLUE FP

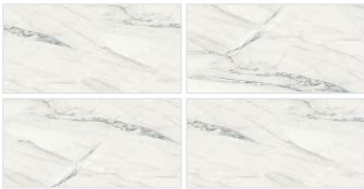

 5 mm TILES SPACERS
RECOMMENDATION



600x1200mm | Full Polish

Tiles Shown: ASPIRE GRANDE JULIET BLUE FP



GLAZED
VITRIFIED TILES



600x
1200mm

FULL
POLISH

A2PIRE

-  **VERSATILE SOLUTIONS**
-  **EASIER TO LAY**
-  **RESISTANT TO CHEMICAL**
-  **RESISTANT TO LOADS**
-  **RESISTANT TO STAINS**
-  **WIDE RANGE**

ASPIRE GRANDE MIRROR CRISTELLO WHITE FP

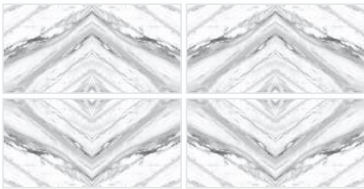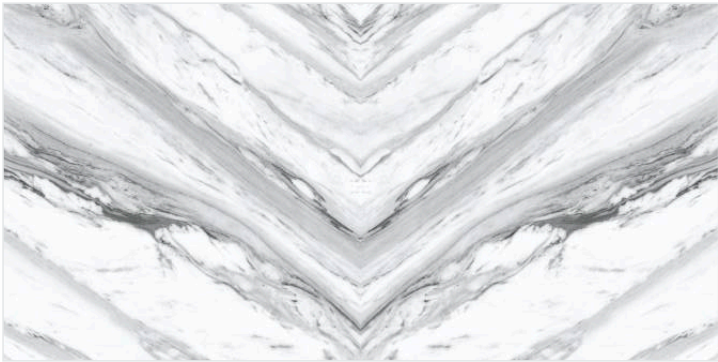

 **5 mm TILES SPACERS
RECOMMENDATION**



600x1200mm | Full Polish


Tiles Shown:
ASPIRE GRANDE MIRROR CRISTELLO WHITE FP




DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.


Recognising this situation, it is necessary to be informed on the grade of design & pattern variation that is expected from these products. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.




V1 Uniform Appearance



V2 Slight Variation



V3 Moderate Variation



V4 Substantial Variation

The classification is as follow:

V1 Minimal Variation **V2** Random Variation **V3** Slight Variation **V4** Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles.

For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder




VEILCRAFT (VC) SHIELD

Not only look and style; the buzz word for the Gen X tile is timeless elegance. Here comes the revolutionary patented "VeilCraft (VC) Shield" technology, a 'high abrasion resistant glaze composition', known as VC (VeilCraft) Shield. This is the first ever patented technology in Indian Ceramic Industry. This not only gives you the perfect aesthetics for your space but also the lifelong protection to your floor.


Result Of The abrasion test at 25,000 revolutions as per the PEI Methodology



Natural Granite



Marble



Traditional Tile




VC Shield Tile



Polished Vitrified Tile

Patent Certificate for
"High Abrasion Resistant Glaze"
applied on VC Shield Tiles

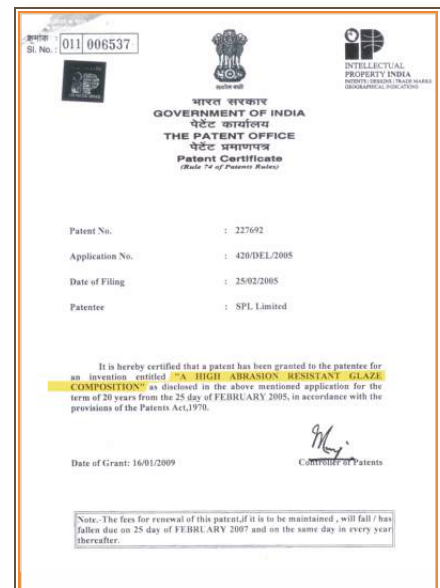

PACKING DETAIL FOR 600x1200mm GVT TILES

Nominal Size (mm)	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
600x1200mm	8.5 mm	27.5 (+/-0.0) Kgs	2 Pcs	1.44sq.mtr. / 15.50sq.ft.

TECHNICAL SPECIFICATION FOR 600x1200mm GVT TILES

Characteristics	Requirement as per IS 15622 :2017 0.08 < E ≤ 3% Group Blb	Requirement as per ISO 13006 ≤ 0.5% Group Bla	Our Values	Test Method
A) Dimension & Surface Quality				
i) Length & Width	± 0.10%	± 0.3%	± 0.10%	IS 13630 Part 1/ ISO 10545-2
ii) Thickness	± 5.0%	± 5.0%	± 4.0%	
iii) Straightness of Side	± 0.10%	± 0.3%	± 0.10%	
iv) Rectangularity	± 0.10%	± 0.3%	± 0.10%	
v) Surface Flatness				
a) Center curvature (%) (max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	
b) Edge curvature (%) { max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	
c) Corner warpage (%) (max.Deviation)	± 0.50%	± 0.4%	± 0.2 %	
vi) Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties				
i) Water Absorption	Av. 0.08<E ≤ 3 %, Individual 3.3 max	Av ≤ 0.5 %, Individual 0.6% max	Avg. E≤ 0.5 %	IS 13630 Part 2/ ISO 10545-3
ii) Modulus of Rupture [N/mm ²]	Av 30, Individual 27 min	Av 35, Individual 32 min	Avg.35	IS 13630 Part 6/ISO 10545-4
iii) Breaking Strength in N	1100	1300	Min, 1300	
iv) Scratch Hardness of surface (Mohs)	Min 5	N/A	Min.5	IS 13630 Part 13
v) Resistance to Abrasion of glazed tiles(Class I to V)	Min II	Abrasion Class & Cycle passed	Class-V	IS 13630 Part 11 /ISO 10545-7
vi) Coefficient of linear thermal expansion from embian temperature to 100° C	7 X 10 ⁻⁶ K ⁻¹ max	Test Method Available	Max 6 X 10 ⁻⁶ K ⁻¹ max	IS 13630 Part 4/ ISO 10545-8
vii) Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
viii) Craziing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
ix) Impact Resistance as Co-efficient of Restitution (COR)	0.55 min	Test Method Available	Min 0.55	IS 13630 Part-14/ISO 10545-5
x) Frost Resistance	Required	Required	100 Cycle Passed	IS 13630 Part 10/ISO 10545-12
C) Chemical Resistance (glazed Tiles)				
i) Stain Resistance	Min Class 1	Min Class 3	Min Class-1	IS 13630 Part 8 &ISO 10545-14
ii) Resistance to household chemicals	Min Class AA	Min B	Min Class AA	IS 13630 Part 8/ ISO 10545-13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value	Min Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. “ Technical Specification” for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

SOMANY
Bathware

Our PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

Ezy Fix

TILES ADHESIVES & GROUTS

SOMANY



HIGH STRENGTH POLYMER MODIFIED TILE ADHESIVE



BENEFITS

- » READY AND EASY TO USE
- » EXCELLENT BONDING WITH ALL SURFACES
- » FAST SETTING
- » SELF-CURING

USES

- » FOR FIXING ALL TYPE OF TILES
- » FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE



Power of Desire



SOMANY

Somany Ceramics Limited

Corporate Office: F-36, Sector-6, Noida-201301, Uttar Pradesh; Ph.: 0120-4627900

Ahmedabad Office: 601 to 606, 6th Floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover, S.G. Highway, Ahmedabad-382481; Ph.: 079-27661103 & 04

Registered Office: 2, Red Cross Place, Kolkata-700001; Ph.: 033-22487406/5913

www.somanyceramics.com | e-mail: customer.care@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00 am to 6:30 pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics

