



Power of Desire



SOMANY

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: 601 to 606, 6th floor, Aalps Euphoria, Opp. Adani CNG Pump, B/s. Gota Flyover,

S.G. Highway, Ahmedabad, Gujarat-382481. Ph.: 079-27661103 / 27661104

Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913

www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:
www.somanyceramics.com



Find us at:
www.facebook.com/SomanyCeramic



Find us at:
www.twitter.com/SomanyCeramic



Find us at:
www.instagram.com/SomanyCeramics

DURAGRES / CAT / APRIL - MAY 2024

DURAGRES
Timeless Elegance

SOMANY
Tiles | Bathware

ZAMEEN SE JUDEY

MAY 2024

**GLAZED
VITRIFIED
TILES**

COLLECTION

800x1600mm

UNIT - 6 | FOR ALL INDIA

800x1600mm **FULL POLISH**



ENORME AMARILLO GREY FP



- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- RESISTANT TO LOADS
- RESISTANT TO STAINS
- WIDE RANGE


SOMANY **DURAGRES**



ENORME ARIZONA BIANCO FP ●



800x1600mm **FULL POLISH**

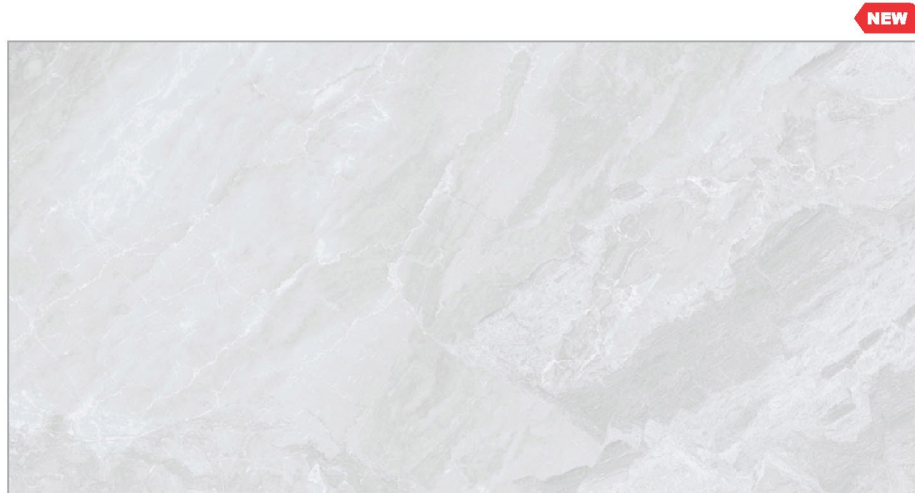


ENORME GIALLO SILVER FP



- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- RESISTANT TO LOADS
- RESISTANT TO STAINS
- WIDE RANGE


SOMANY[®]
DURAGRES

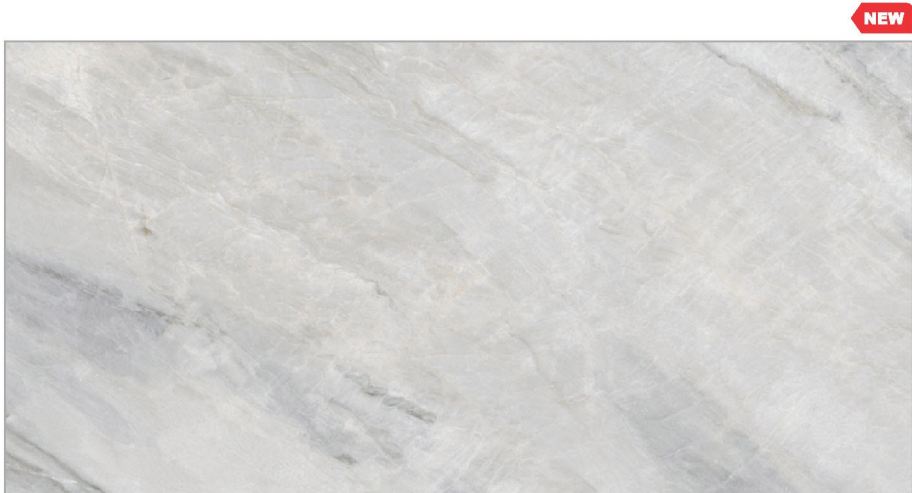


ENORME GIOIA GREY FP ●



800x1600mm **FULL POLISH**

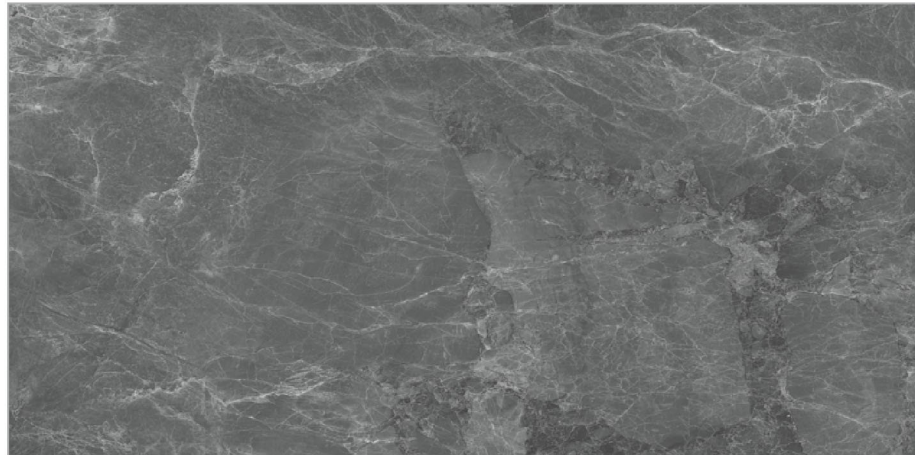


ENORME LUNIA NOIR FP

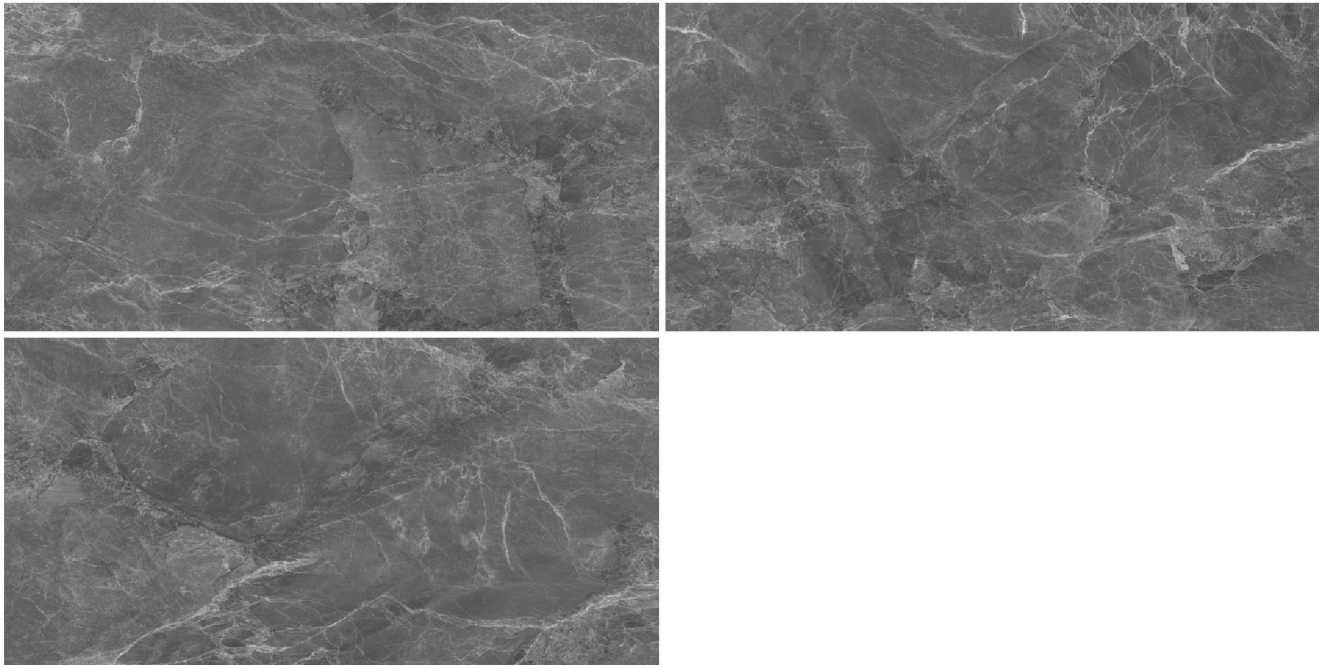


-  **VERSATILE SOLUTIONS**
-  **EASIER TO LAY**
-  **RESISTANT TO CHEMICAL**
-  **RESISTANT TO LOADS**
-  **RESISTANT TO STAINS**
-  **WIDE RANGE**

SOMANY
DURAGRES

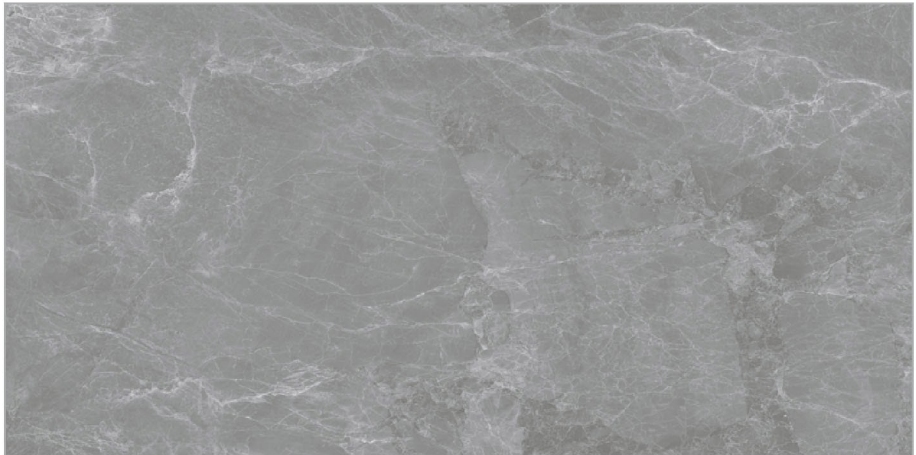

ENORME LUNIA GRIS FP

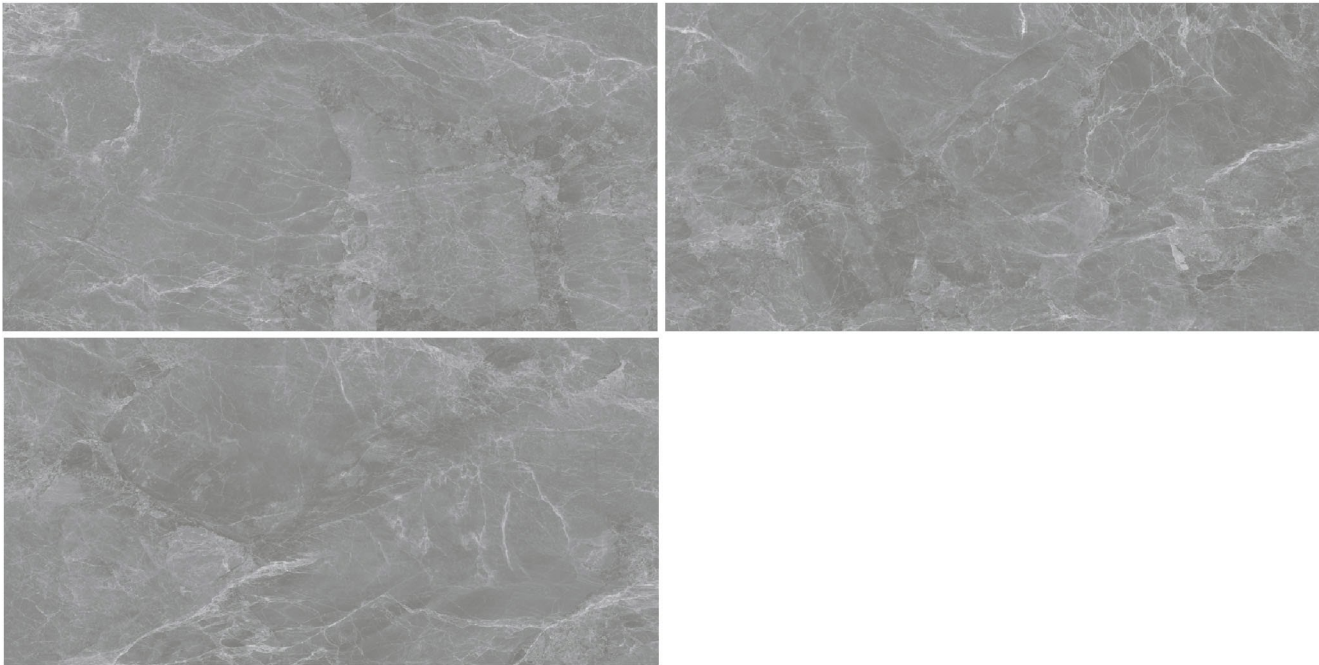

800x1600mm **FULL POLISH**



ENORME LECION GREY FP



-  **VERSATILE SOLUTIONS**
-  **EASIER TO LAY**
-  **RESISTANT TO CHEMICAL**
-  **RESISTANT TO LOADS**
-  **RESISTANT TO STAINS**
-  **WIDE RANGE**

SOMANY?
DURAGRES




ENORME MARONYX CREMA FP ●



800x1600mm **FULL POLISH**




ENORME NIAGARA TEAL FP

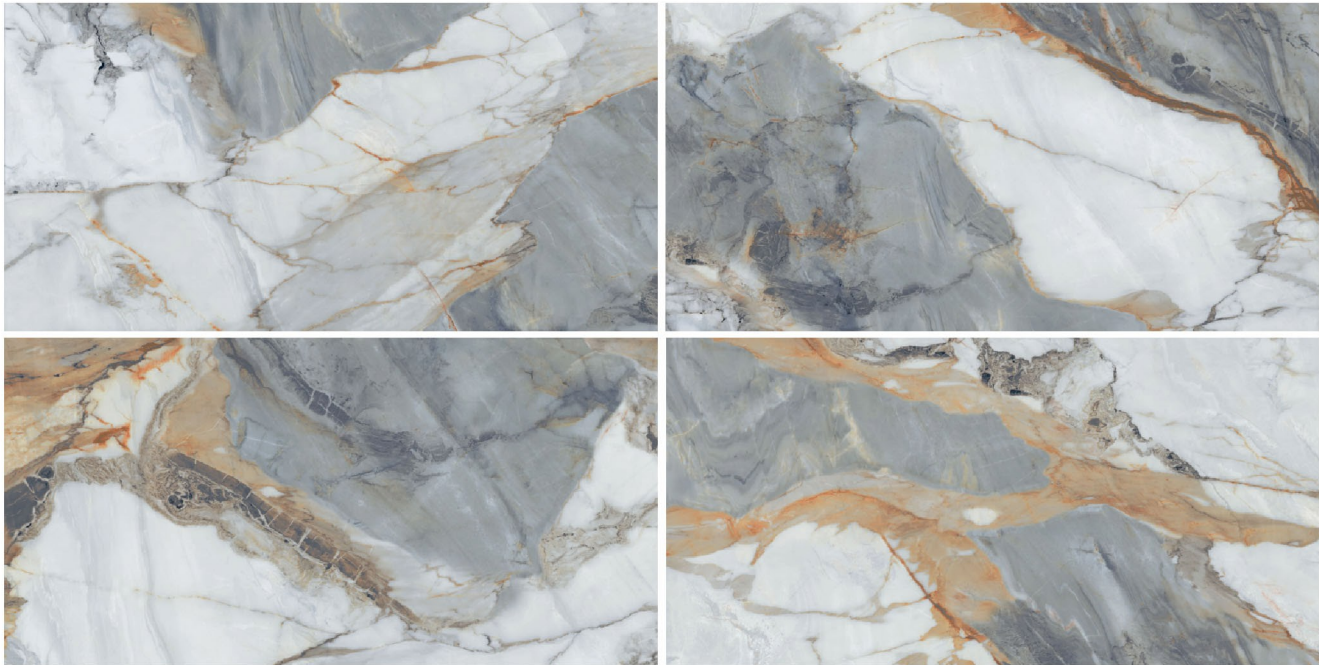

- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- RESISTANT TO LOADS
- RESISTANT TO STAINS
- WIDE RANGE

SOMANY
DURAGRES

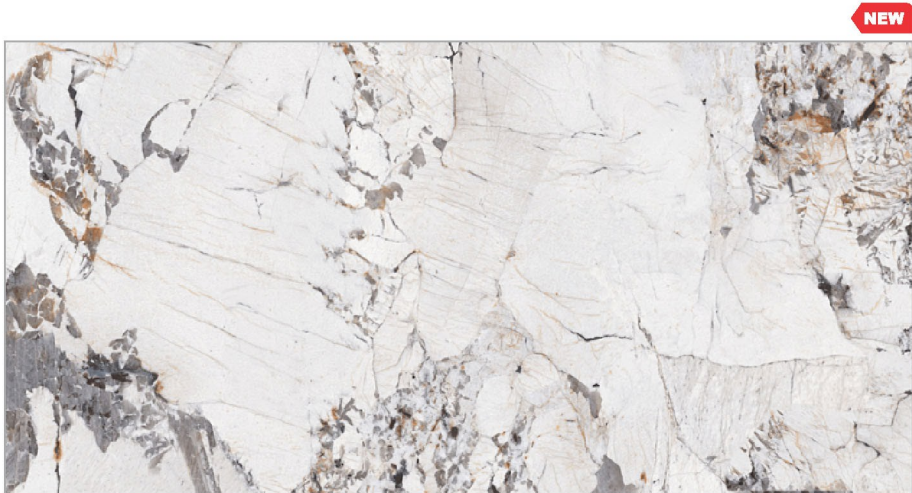

ENORME PATAGONIA JAZZ FP ●



800x1600mm **FULL POLISH**



ENORME RIO TUNISIA BEIGE FP ●



- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- RESISTANT TO LOADS
- RESISTANT TO STAINS
- WIDE RANGE

SOMANY
DURAGRES



ENORME SAHARA BEIGE FP ●



800x1600mm **FULL POLISH**



ENORME SAHARA GREY FP



- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- RESISTANT TO LOADS
- RESISTANT TO STAINS
- WIDE RANGE


SOMANY[®]
DURAGRES



ENORME SAHARA NOIR FP



800x1600mm **FULL POLISH**

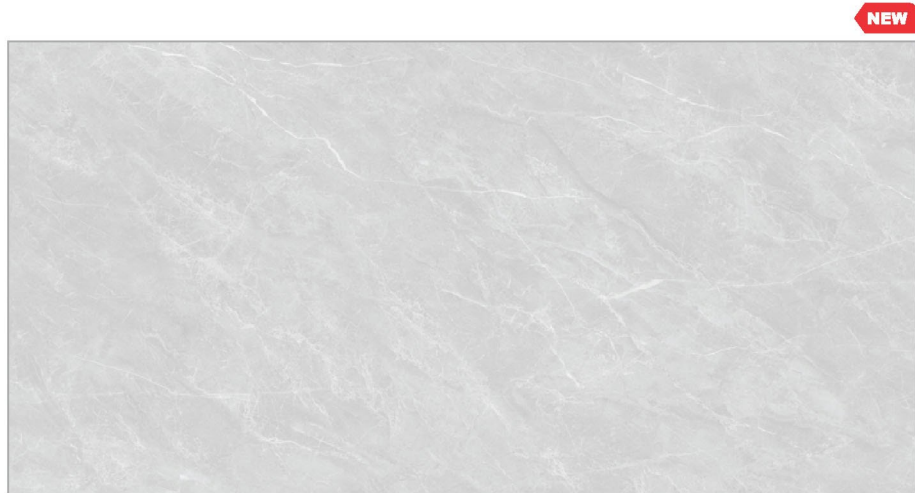


ENORME SWISS SILVER FP ●



-  **VERSATILE SOLUTIONS**
-  **EASIER TO LAY**
-  **RESISTANT TO CHEMICAL**
-  **RESISTANT TO LOADS**
-  **RESISTANT TO STAINS**
-  **WIDE RANGE**

SOMANY?
DURAGRES

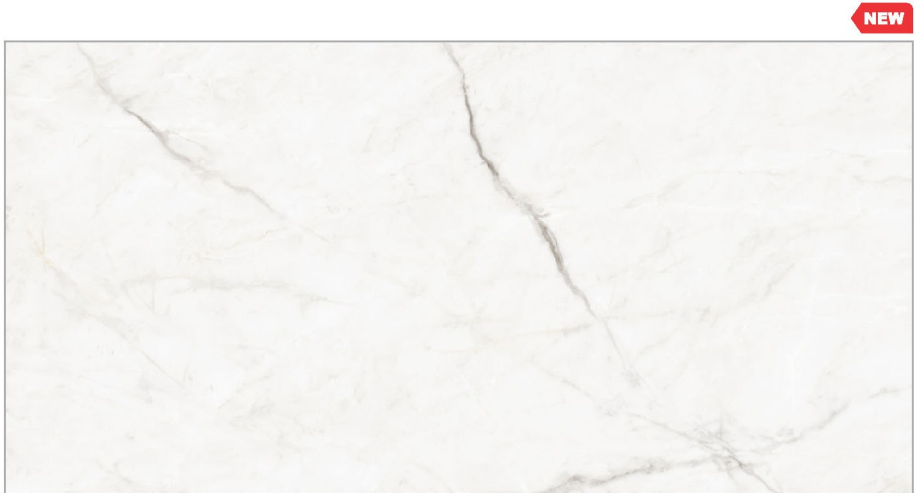

ENORME VITARA MOON FP ●



800x1600mm **FULL POLISH**




ENORME WILLIAM BEIGE FP ●



- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- RESISTANT TO LOADS
- RESISTANT TO STAINS
- WIDE RANGE


SOMANY
DURAGRES

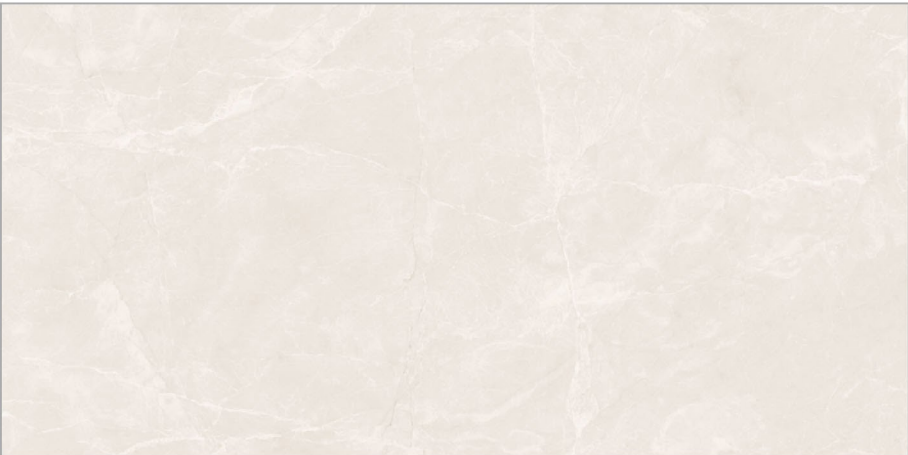

ENORME PRISTINE CREMA FP



800x1600mm **FULL POLISH**

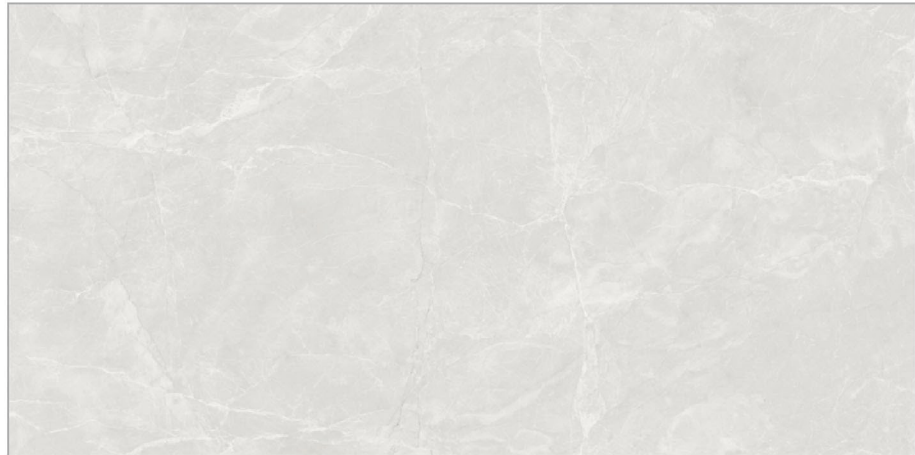

NEW

ENORME PRISTINE GREY FP ●




- VERSATILE SOLUTIONS
- EASIER TO LAY
- RESISTANT TO CHEMICAL
- RESISTANT TO LOADS
- RESISTANT TO STAINS
- WIDE RANGE

SOMANY
DURAGRES




NEW

ENORME PRISTINE GRIS FP

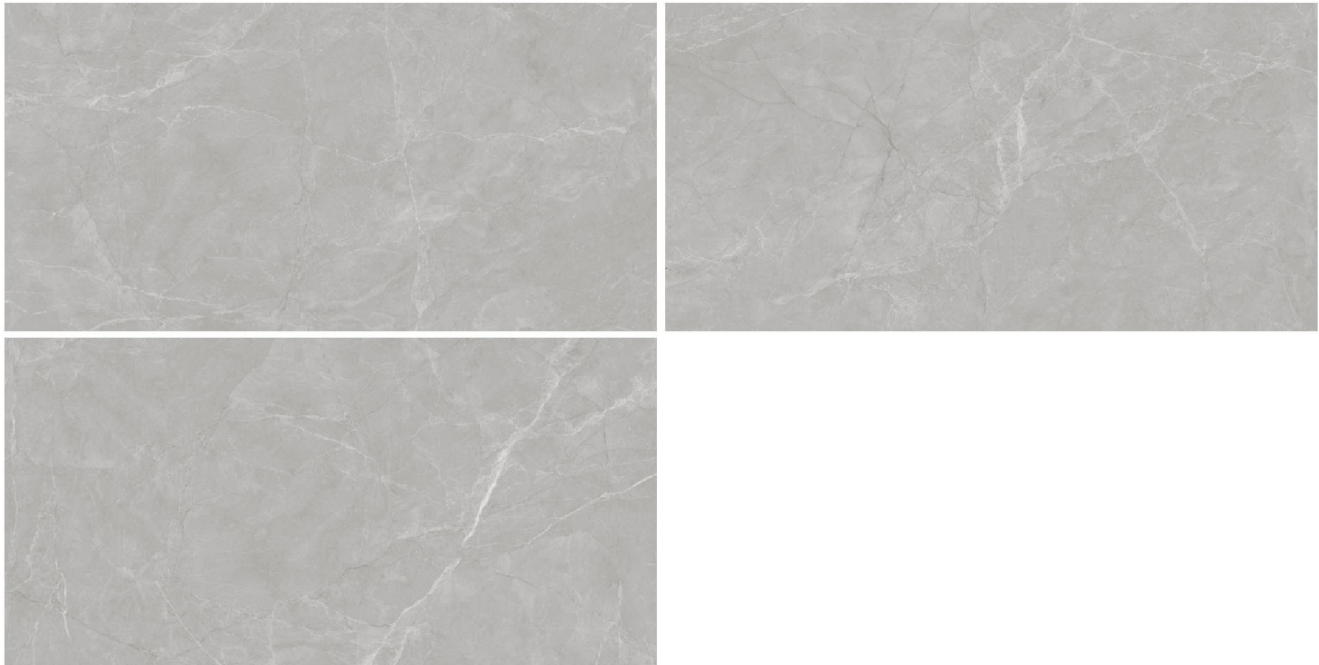

800x1600mm **MATT CARVING FINISH**

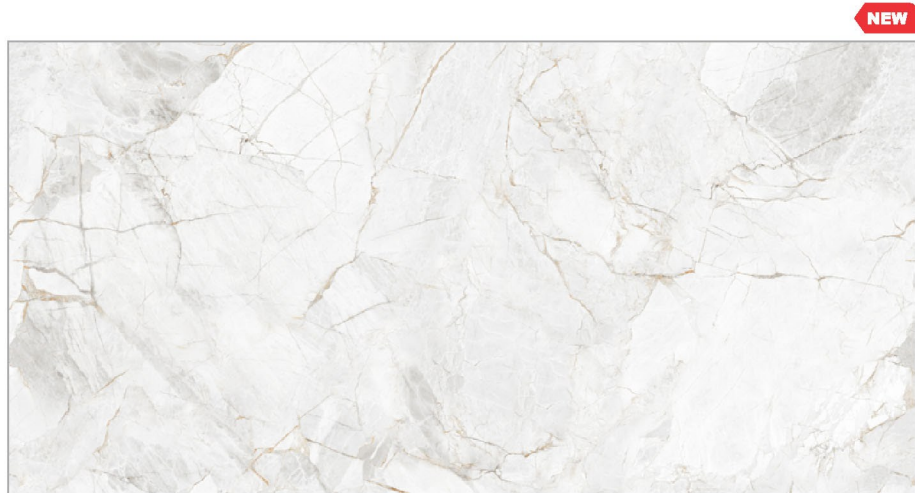

ENORME IMP ARIZONA BIANCO



VERSATILE
SOLUTIONS



EASIER
TO LAY



RESISTANT TO
CHEMICAL



RESISTANT
TO LOADS



RESISTANT
TO STAINS



WIDE
RANGE

SOMANY
DURAGRES

800x1600mm TECHNICAL SPECIFICATION

PACKING DETAIL FOR 800x1600MM GVT TILES UNIT - 6				
Nominal Size	Thickness(mm)	Average weight per carton (Kgs)	No. of tiles per carton	Coverage area per carton
800 x 1600	9.0(+/-0.2)	52 ~ 52.5 Kgs	2	2.56 Sq.Mtr

TECHNICAL SPECIFICATION FOR 800x1600MM GVT TILES UNIT - 6					
Characteristics	Requirement as per IS 15622 :2017 Group Bla Table 8 E ≤ 0.08% Group BLA		Requirement as per ISO 13006 Annex-G, E ≤ 0.5% Group Bla	Our Values	Test Method
A) Dimension & Surface Quality		Rectified			IS-13630 ISO 10545
I) Length & Width		± 0.10%	± 0.30%	± 0.10%	IS 13630 Part 1 ISO 10545 Part 2
II) Thickness		± 5.0%	± 5.0%	± 4.0%	
III) Straightness of Side		± 0.10%	± 0.3%	± 0.10%	
iv) Rectangularity		± 0.10%	± 0.30%	± 0.10%	
v) Surface Flatness					
a) Center curvature (%) (max.Deviation)		± 0.5%	± 0.4%	± 0.20 %	
b) Edge curvature (%) (max.Deviation)		± 0.5%	± 0.4%	± 0.20 %	
c) Corner warpage (%) (max.Deviation)		± 0.5%	± 0.4%	± 0.20 %	
vi) Surface Quality		Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
B) Physical Properties					
I) Water Absorption		Average E<0.08 %	E≤ 0.5, Individual max 0.6%	For IS-15622 avg-E<0.08%, For ISO-avg-E<0.50%	Part 2 Part 3
II) Modulus of Rupture [N/mm2]		Avg. 35, Individual 32 min	Avg 35, Individual 32 min	Avg.35	Part 6 Part 4
iii) Breaking Strength in N		Min.1300	Not less than 1300	Min.1300	Part 3 Part 10
iv) Moisture Expansion in mm/m		0.02 Max	Test Method Available	0.02 Max	Part 13
v) Scratch Hardness of surface (Mohs)		Min 5	N/A	Polished 3, Matt 4, V.C-5	Part 12 Part 6
vi) Resistance to Deep Abrasion of unglazed tiles		N/A	N/A	N/A	Part 11 Part 7
vii) Resistance to Abrasion of glazed tiles(Class I to V)		Comercial application Min IV Home Application Min II	Report Abrasion Class & Cycle Passed	Depends on Glaze surface, Glossy polish	Part 4 Part 8
viii) Coefficient of linear thermal expansion from ambient temperature to 100° C		6 X 10 ⁻⁴ K ⁻¹ max	Test Method Available	6 X 10 ⁻⁴ K ⁻¹ max	Part 5 Part 9
ix) Thermal Shock Resistance		10 cycle min	Test Method Available	Passed 10 cycle	Part 9 Part 11
x) Crazeing Resistance		4 cycle @ 7.5bar min	Required	Passed 4 cycle	Part 10 Part 12
xi) Forst resistance		Required, If agreed	Test Method Available	Resistance	Part 2 Part 5
xii) Bulk Density		2.2 gm/cc	NA	2.2gm/cc Min	Part 14
xiii) Impact resistance		0.55 Min	Test Method Available	0.55 min	
C) Chemical Resistance (glazed Tiles)					
I) Stain Resistance		Min Class 1	Min Class 3	Min Class-1, Class 2 (for polish)	Part 6 Part 14
ii) Resistance to household chemicals		Min Class AA	Min. Class B	Min Class AA	Part 6 Part 13
iii) Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)		Required if agreed	Manufacture to state classification	Min Class AA	

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see the physical sample before placing the order. " Technical Specification" for Somany wall & floor tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation. Company will not entertain complaints once tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.

SOMANY[®]
Bathware

Our
PORTFOLIO



Water Closets | Basins | Faucets | Showers | Water Heaters | Accessories

SOMANY.

Ezy Fix®

TILE ADHESIVE



HIGH STRENGTH POLYMER MODIFIED TILE ADHESIVE



BENEFITS

- » **READY AND EASY TO USE**
- » **EXCELLENT BONDING WITH ALL SURFACES**
- » **FAST SETTING**
- » **SELF-CURING**

USES

- » FOR FIXING ALL TYPE OF TILES
- » FOR NEW FLOORING AND RENOVATION
- » CAN BE USED FOR TILE ON TILE

NOTE